



## MICROWAVE MOTION SENSOR

Model: AU-X700C



Celling: 8m



IP20



Sensing  
area



Energy  
saving



3-2000 LUX

## INTRODUCTION

AU-X700C Microwave Motion Sensor, a new energy-saving switch, adopts a microwave sensor with high-frequency electromagnetic waves (5.8 GHz) and an integrated circuit. It gathers automatism, convenience, safety, energy-saving, and practical functions. The wide/detection field depends upon the detectors. When one enters the detection field, it can start the load at once and automatically identifies day and night. The installation of this product is very convenient, and it can be used for a wide range of applications. It can be detected easily through doors, glass panes, or even thin walls, making it ultra-reliable as there are no gaps in the detection zone.

## TECHNICAL SPECIFICATIONS

Model	: AU-X700C
Power Source	: 220-240V/AC    50Hz
HF System	: 5.8Ghz CW Radar, ISM Band
Transmission Power	: <0.2mW
Time Delay	: Min. 10Sec ±3Sec, Max. 12Min ±1Min
Rated Load	: 2000W (Incandescent), 1000W (LED Load)
Detection Range	: 360°
Detection Distance	: Ceiling: 1-8m (radius)
Ambient Light	: <3-2000LUX
Installation Height	: Ceiling: (2-8m)
Power Consumption	: Approx. 0.9W
No. of Wires	: 4 Wires
Detection Motion Speed	: 0.6-1.5m/s

## FUNCTIONAL MODES

### Can identify day and night

- It can work during the daytime and the night when adjusted to the “sun” position (max). It can work in less than 3 LUX ambient light when adjusted on the “3” position (min). As for the adjustment pattern, please refer to the testing pattern.

### Adjustable sensitivity

- This sensor can be easily adjusted depending on the location. The detection distance of low sensitivity could be only 1m, and high sensitivity could be 8m which fits for a larger room.


### Adjustable time delay

- The time delay can be set according to the customer’s desire. The minimum time is 10sec  $\pm$  3sec, and the maximum is 12min  $\pm$  1min.

## INSTALLATION INSTRUCTIONS

- Please move the upper cover with anti-clockwise whirl as per the diagram on the right.
- Connect the power and the load according to the connection-wire diagram.
- Fix the bottom on the selected position with the inflated screw.
- Install back the upper cover on the sensor, then you could switch on the power and test it.


## CONNECTION – WIRING DIAGRAM

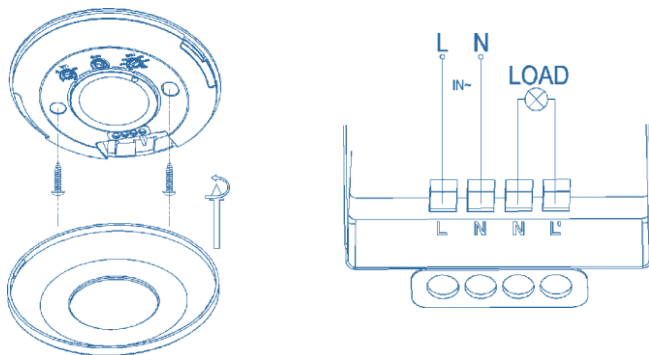

**Note:** When testing in daylight, please turn LUX knob to (SUN) position, otherwise the sensor could not work.

## TEST


- On the LUX knob clockwise to the maximum (sun). Turn the sensitivity knob clockwise to the maximum (+) and then turn the TIME knob anti-clockwise to the minimum (10s).
- As soon as you switch on the power, the light will be on at Once, and 10sec  $\pm$  3sec later, the light will automatically turn off. Then if the sensor receives the induction signal again, it can start working normally.
- When the sensor receives the second induction signal within the first induction, it will restart from that moment itself.
- Turn the LUX knob anti-clockwise on the minimum (3) if the ambient light is less than 3LUX (darkness); the inductor load will work when it receives the induction signal.

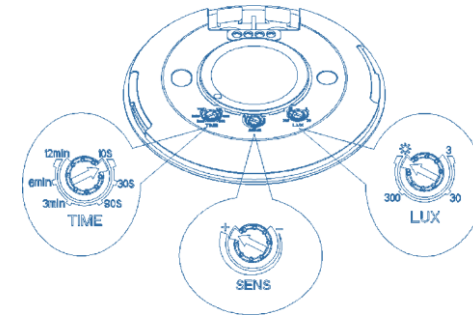


## LUX FUNCTION CHECK

### Daylight Function


The hold time is set to 30 seconds, and LUX is set to 300. The light switches on when it detects movement, and it switches off after 30 seconds of no movement.

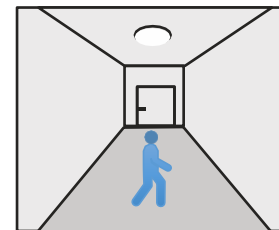

When the motion is detected with sufficient daylight (>300LUX), the light remains OFF.

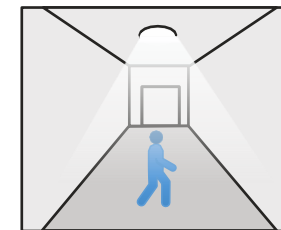


When the motion is detected with insufficient daylight (<300LUX), the light switches ON.

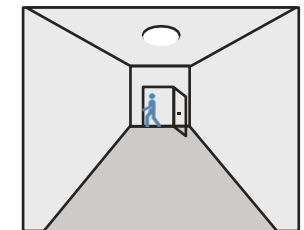


After the last detection and the present hold time-lapse (30 seconds), the light switches OFF.

## No Daylight Function


The hold time is set to 30 seconds, and LUX is set to ☀ or 2000. The light switches on when it detects movement, and when people leave, it switches off after the hold time is lapsed (30 seconds).

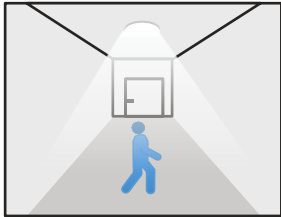

When the motion is detected, the sensor will switch on the light to 100% brightness

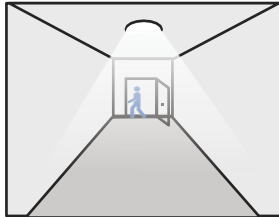


After the people leave the detection area, the light remains at 100% brightness within the hold time.

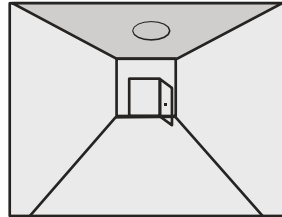

After the last detection and the present hold time-lapse (30 seconds), the light switches OFF.

## SAFETY INSTRUCTIONS

- Only an electrician or an experienced human can install it.
- In front of the sensor there shouldn't be obstructive object affecting detection.
- No obstructive objects should be in front of the sensor as it affects the detection.
- Do not install it near metal and glass as they may affect the sensor.
- In order to avoid the unexpected damage of product, please add a safe device of current 6A when installing microwave sensor, for example, fuse, safe tube etc.

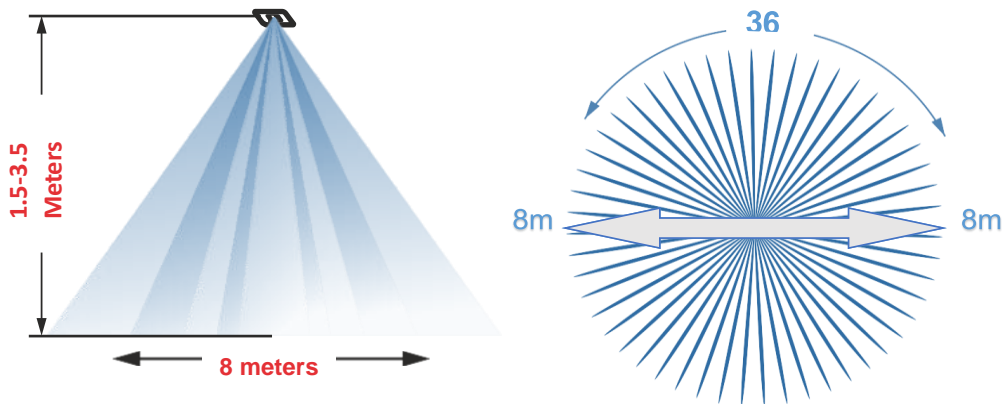

## APPLICATIONS



Cold Storage



Lobby



Hotels



Hospital



Fire Exit

## TROUBLESHOOTING

Malfunction	Cause	Remedy
The load will not work	Wrong light control is selected Faulty load faulty main switch is switched OFF	Adjust the setting Change load Turn the switch ON
The load is always on	There is a continuous movement in the detection zone	Check the zone setting
The load is ON without any identifiable movement	The sensor is not mounted for detecting the movement reliably The movement has occurred behind a nearby thin wall or glass.	Securely mount the enclosure Check zone setting
The load will not work despite the movement	Rapid movements are being suppressed to minimize the malfunctioning The "SENS" knob may not be fully clockwise.	Turn the "SENS" knob fully clockwise.