



SMART CONTROL PANEL – 4” INCH

Model: AU-XSCP4



Compact
Size



Room
Separation



Fast
Response



Built-in
“Alexa”



Smart ECO
System

INTRODUCTION

AutronX **Smart Control Panel 4” inch** is a compact all-in-one smart home control panel designed to simplify the management of lighting, curtains, climate, security, and other smart devices. Featuring a 4-inch HD touchscreen, built-in Zigbee gateway, Wi-Fi connectivity, and Alexa Voice Service, it provides seamless control and automation from a single wall-mounted interface. Compatible with thousands of Tuya-enabled devices, the AU-XSCP4 offers convenient scene control, voice commands, and smart home automation in one elegant solution.


TECHNICAL SPECIFICATIONS

Model	: AU-XSPC4
Product Name	: Smart Control Panel 4” inch
Input Voltage	: 100-240 V/AC 50/60Hz
Display	: 4-Inch HD IPS Touch Screen
Installation Type	: Flush Wall Mount
Wireless Network Protocol	: Wi-Fi 2.4GHz Zigbee 3.0 Sigmesh
Voice Control	: Built-in Alexa Voice Service
Device Compatibility	: 41,000+ Smart Ecosystem Devices
Languages	: Multi-language Support
Zigbee Gateway	: Built-in
Rated Current	: 74mA
Dimensions	: 86x86x36.2mm

KEY FEATURE

-  **4-Inch HD Touch Display** – Intuitive control and real-time device monitoring
-  **Built-in Zigbee Gateway** – Seamless connectivity with Zigbee smart devices
-  **Alexa Voice Service** – Hands-free smart home control through voice commands
-  **All-in-One Smart Home Controller** – Manage lights, curtains, scenes, climate, and more from one panel
-  **Supports 41,000+ Smart Devices** – Compatible with a wide range of smart home products
-  **Simple Flush-Mount Installation** – Easy integration into standard wall boxes
-  **Customizable Scenes & Automation** – Create personalized routines and smart Scenes according to your space and ambiance.
-  **Smooth & Responsive Interface** – Fast navigation with a user-friendly experience

FUNCTIONAL INTERFACE

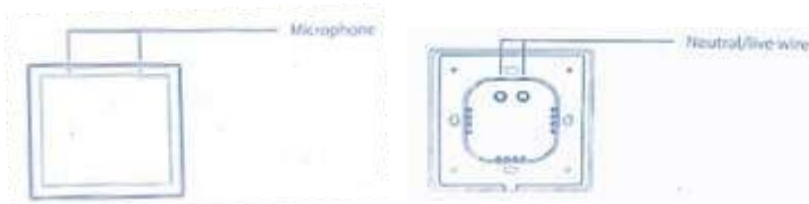


INSTALLATION INSTRUCTIONS

Step 1: Turn **OFF** the main power supply before installation.

Step 2: Remove and separate the *front display module* from the *backend power module*.

Step 3: Connect the power wires:

- **L** → Phase (Live) Wire
- **N** → Neutral Wire

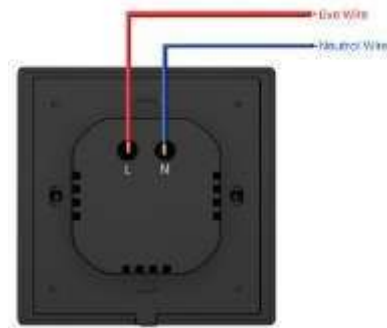

Step 4: Fix the **backend module** into the concealed wall box with the **UP arrow facing upward**.



Step 5: Carefully connect the **front display module** to the **backend module** through the panel connectors.

Step 6: Gently mount and secure the **front display module** onto the backend module. Do not apply excessive force.

Step 7: Turn **ON** the power supply.

Step 8: Wait for the panel to boot up and verify normal operation.

INSTALLATION & SETUP

1. Connect the panel to the local **Wi-Fi network**.
2. Open the **AutronX / Smart Life App** and scan the **QR code** displayed on the panel.
3. Complete the pairing process to link the panel with your smart home account.
4. Once connected, all configured **devices, rooms, scenes, and automation settings** will automatically synchronize with the panel.
5. Sign in with the same smart home account on **Alexa** to access the synced configuration and control supported devices using **voice commands**.
6. Customize **rooms, scenes, automation routines, and shortcuts** as required.
7. Start controlling **lights, curtains, climate, audio, sensors, locks, and other smart devices** directly from the control panel or through **Alexa voice assistance**.