



SINGLE DOOR SENSOR

Model: AU-X SD60



5-10 CM



IP20



Energy saving

TECHNICAL SPECIFICATIONS

Model	AU-X SD60
Product Name	Single Door Sensor
Input power supply	DC 12-24 V
Sensing Range	5-10 cm
Maximum Load	12V-60W / 24V-100W
Sensor head wire length	2 meters
Operating Mode	Door sense mode
Installation Method	Concealed / Surface mount

WORKING INSTRUCTIONS

INPUT


Connect your SMPS/Adapter +VE to Input “Letter marking wire”

Connect your SMPS/Adapter -VE to Input “----- marking wire “

OUTPUT

Connect your LED +VE to Output “Letter marking wire”


Connect your LED -VE to Output “----- marking wire”

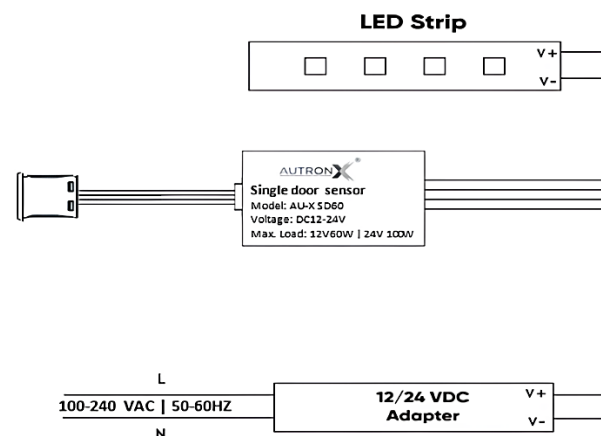

MOUNTING TYPE

CONCEALED:

- Drill holes for sensor & hidden cable routing then fix the sensor head.

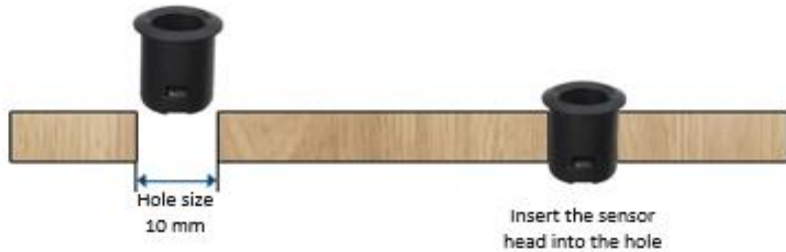

SURFACE MOUNT:


- Fix the sensor clamp by screw then fix the sensor head in to the clamp.



PRODUCT MEASUREMENTS



Sensor Head

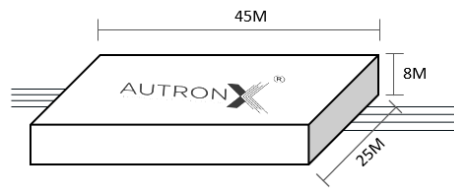

Sensor Driver

HOW IT WORK



SENSOR HEAD REPLACEMENT

- When the sensor is broken.
- There is no need to replace the whole sensor.
- Just replace the sensor head and continue to use.



APPLICATIONS



Cabinet



Wardrobe



Kitchen



Washroom

SAFETY INSTRUCTIONS

- Indoor use only.
- Do not disassemble the product.
- Please do not install the switch in a water drip location.